

Irganox® 1076

Product description


Irganox® 1076 is a highly effective, primary phenolic antioxidant for organic substrates such as coatings, plastics, elastomers, adhesives, waxes. It protects these substrates against thermo-oxidative degradation.

Key benefits

- Non-discoloring
- Odorless
- High resistance to extraction, low volatility and good compatibility
- Can be used in combination with other additives such as co-stabilizers, light stabilizers and other functional stabilizers (e.g. HALS)
- Synergy is observed when used in combination with secondary antioxidants (peroxide decomposers) such as phosphites (Irgafos® 168, Irgafos® 126) or thioethers (Irganox® PS 800, Irganox® PS 802)

Chemical nature

Octadecyl-3-(3,5-di-tert.-butyl-4-hydroxyphenyl)-propionate

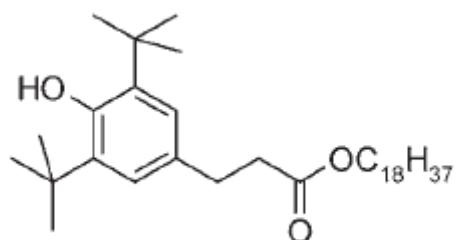

Molecular weight: 531 g/mol, CAS No. 2082-79-3

Properties

Physical form	Irganox® 1076	white, fine granules, powder
	Irganox® 1076 FD	white, free-flowing, dust free pastilles
Technical data		
(no supply specification)		
Melting range		50 – 55 °C
Flashpoint		273 °C
Vapor pressure (20 °C)		2.5 E – 7 Pa
Density (20 °C)		1.02 g/cm ³
Irganox® 1076 Bulk density		560 – 760 g/l
Irganox® 1076 FD		480 – 590 g/l
Solubility (20 °C)		g / 100 g solution
Wasser		< 0.1 %
Butanol		10 %
Methoxypropanol		10 %
Butyldiglycol		10 %
Butylacetate		45 %
Butylglycolacetate		25 %
Methoxypropylacetate (MPA)		30 %
Methylethylketone		50 %
Solvesso 100		50 %
Xylene		55 %

Application

Irganox® 1076 can be used in coatings exposed to high temperatures during processing (e.g. extrusion), during their bake cycle and/or their service life. Examples include powder or coil coatings, where Irganox® 1076 can prevent thermally induced oxidation thus helping to reduce bake and overbake discoloration (especially in white and pastel tones).

NOTE: phenolic antioxidants such as Irganox® 1076 cannot be used in direct gas fired ovens due to interaction with NOx resulting in strong discoloration.

Guideline for use

For coating applications requiring long-term thermal stabilization the recommended concentration range is 1 – 2 % (based on total solids of the formulation).

In systems where polymers are already prone to oxidation during processing, the performance can be further improved in synergistic combinations with phosphites (Irgafos® range).

For long-term UV protection along with thermal stabilization the antioxidant(s) need to be used in combination with light stabilizers (clear coats: UV absorber and HALS; pigmented systems: HALS or UV absorber/HALS depending on pigmentation level).

Storage

Irganox® 1076 shall be stored in its tightly sealed original packaging at temperatures between 5 °C and 40 °C.

Safety

When handling this product, please comply with the advice and information given in the safety data sheet and observe protective and workplace hygiene measures adequate for handling chemicals.

Note

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our product to ensure that any proprietary rights and existing laws and legislation are observed.